



# .: ASM-12H2 .:


## TECHNICAL SPECIFICATIONS

### ASYMMETRICAL SERIES

A two-way multiple purpose monitor for horizontal and vertical uses. With its asymmetrical horn, this unit will give you the flexibility you need for multiple applications. The ASM-12H2 was designed with the most advanced technologies for a maximum linearity at high power levels.



#### OUTLINE DRAWING

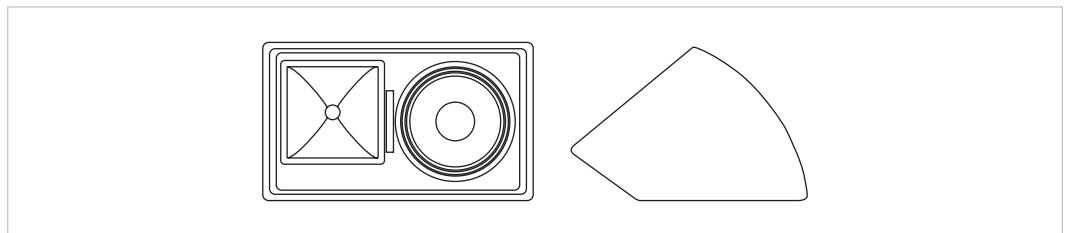

#### DESCRIPTIVE DATA

<b>Frequency range</b> ·	50 Hz - 20 kHz	<b>Material/Cabinet</b> ·	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b> ·	99 dB	<b>Finish</b> ·	Urethane
<b>Maximum SPL</b> ·	135	<b>Grille</b> ·	Perforated metal
<b>RMS (W)</b> ·	500	<b>Connections</b> ·	Speakon (opt. bar strip)
<b>Peak power (W)</b> ·	1000	<b>Height (In/cm)</b> ·	17" / 43.18
<b>Impedance (Ohms)</b> ·	8	<b>Width In/cm)</b> ·	25" / 63.50
<b>Passive crossover</b> ·	1.6 KHz	<b>Depth (In/cm)</b> ·	16 3/8" / 41.61
<b>Dispersion (Horiz./Vert.)</b> ·	100° x 60° x 50° (2")	<b>Weight (lbs/Kg)</b> ·	71 / 32.27
<b>High frequencies</b> ·	2" driver	<b>Fixing points</b> ·	11 points
<b>Low frequencies</b> ·	1 x woofer 12"		

#### SPL VS FREQUENCY

