



# .: ASM-15H2 .:


## TECHNICAL SPECIFICATIONS

### ASYMMETRICAL SERIES

This two-way 15" monitor has an asymmetrical horn that provides LF reinforcement up to 40 Hz. It can be used as a stage monitor or in a vertical position. The 15" woofer produces a very sensitive and transient response. This is a powerful multiple use cabinet great for vocals.



#### OUTLINE DRAWING

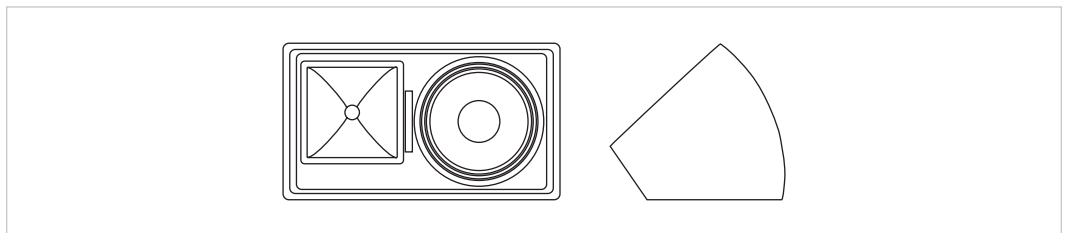

#### DESCRIPTIVE DATA

<b>Frequency range</b> ·	40 Hz - 18.5 kHz	<b>Material/Cabinet</b> ·	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b> ·	101 dB	<b>Finish</b> ·	Urethane
<b>Maximum SPL</b> ·	139	<b>Grille</b> ·	Perforated metal
<b>RMS (W)</b> ·	800	<b>Connections</b> ·	-
<b>Peak power (W)</b> ·	1600	<b>Height (In/cm)</b> ·	20 1/4" / 51.44
<b>Impedance (Ohms)</b> ·	8	<b>Width In/cm)</b> ·	29 1/4" / 74.30
<b>Passive crossover</b> ·	1.6 KHz	<b>Depth (In/cm)</b> ·	20 1/4" / 51.44
<b>Dispersion (Horiz./Vert.)</b> ·	100° x 60° x 50° (2")	<b>Weight (lbs/Kg)</b> ·	91 / 41.36
<b>High frequencies</b> ·	2" driver	<b>Fixing points</b> ·	11 points
<b>Low frequencies</b> ·	1 x woofer 15"		

#### SPL VS FREQUENCY

