



# :: CP-215H2 ::


## TECHNICAL SPECIFICATIONS

### CENTERPOINT SERIES

This two-way speaker system is equipped with two 15" high performance woofers and one 2" throat compression driver mounted behind our special design horn. The CP-215H2 can be used in passive and active mode, it has a high performance level and wheels for easy handling. It is surely one of the most astonishing loudspeaker system available today.



#### OUTLINE DRAWING

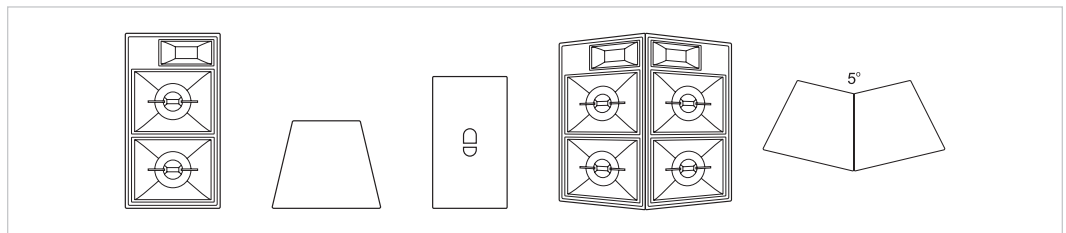

#### DESCRIPTIVE DATA

<b>Frequency range</b> ·	47 Hz / 18.2 kHz	<b>Material/Cabinet</b> ·	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b> ·	LF 107 dB/HMF 109 dB	<b>Finish</b> ·	Urethane
<b>Maximum SPL</b> ·	LF 145/HMF 138	<b>Grille</b> ·	Perforated metal
<b>RMS (W)</b> ·	P* 1800 / A* LF 2x800 / HF 200	<b>Connections</b> ·	-
<b>Peak power (W)</b> ·	P* 3600 / A* LF 2x1600 / HF 400	<b>Height (In/cm)</b> ·	50 1/8" / 127.32
<b>Impedance (Ohms)</b> ·	LF 4/MHF 8	<b>Width In/cm)</b> ·	24 1/2" / 62.23
<b>Passive crossover</b> ·	1.6 KHz	<b>Depth (In/cm)</b> ·	22 3/4" / 57.79
<b>Dispersion (Horiz./Vert.)</b> ·	50° x 40° (2")	<b>Weight (lbs/Kg)</b> ·	161 / 73.18
<b>High frequencies</b> ·	-	<b>Fixing points</b> ·	8 points
<b>Low frequencies</b> ·	2 x woofer 15"		

#### SPL VS FREQUENCY

