



.: FD-115M .:


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

This multiple cabinet is a passive two-way enclosure incorporating a proprietary 15" MB frequency driver with another high frequency driver in a ported trapezoid style. It is a cost effective fully passive sound reinforcement system used by bands, solo artists and in permanent installations in pubs, clubs, theatres or other venues where high quality sound is required.



OUTLINE DRAWING

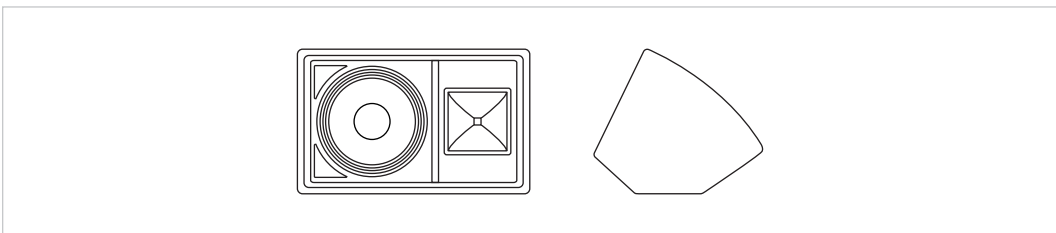

DESCRIPTIVE DATA

Frequency range ·	55 Hz - 18 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	98 dB	Finish ·	Urethane
Maximum SPL ·	130	Grille ·	Perforated metal
RMS (W) ·	400	Connections ·	-
Peak power (W) ·	800	Height (In/cm) ·	28 1/2" / 72.39
Impedance (Ohms) ·	8	Width In/cm) ·	19 1/4" / 48.90
Passive crossover ·	2.2 KHz	Depth (In/cm) ·	16 1/4" / 41.28
Dispersion (Horiz./Vert.) ·	100° x 100° (1")	Weight (lbs/Kg) ·	76 / 34.55
High frequencies ·	1" driver	Fixing points ·	11 points
Low frequencies ·	1 x woofer 15"		

SPL VS FREQUENCY

