



.: FD-118W .:


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

These enclosures not only have a unique and special design; they produce an astonishing bass (down to 36 dB!). Combine them to our FD-315H1, FD-215H1, FD-215H2 or CP-15H10, and you will get the perfect combination for discos, raves, permanent installations and theaters.



OUTLINE DRAWING

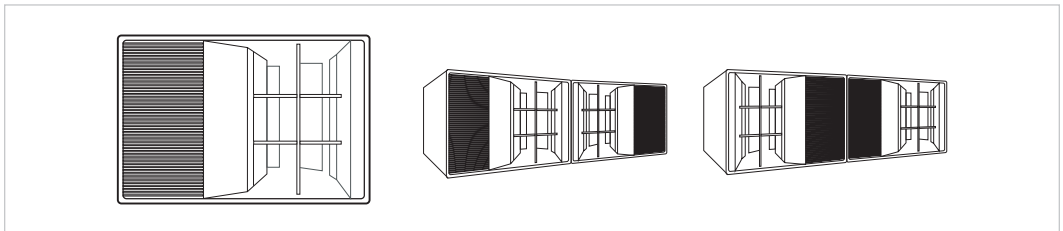

DESCRIPTIVE DATA

Frequency range ·	45 Hz - 500 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	102 dB	Finish ·	Urethane
Maximum SPL ·	136.5	Grille ·	Perforated metal
RMS (W) ·	700	Connections ·	-
Peak power (W) ·	1400	Height (In/cm) ·	36 7/8" / 93.68
Impedance (Ohms) ·	8 opt. 4	Width In/cm) ·	24 1/4" / 61.60
Passive crossover ·	120 Hz	Depth (In/cm) ·	36 1/8" / 91.77
Dispersion (Horiz./Vert.) ·	-	Weight (lbs/Kg) ·	160 / 72.73
High frequencies ·	-	Fixing points ·	-
Low frequencies ·	1 x woofer 18"		

SPL VS FREQUENCY

