



.: FD-121W .:


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

These enclosures not only have a unique and special design; they produce an astonishing bass (down to 36 dBI). Combine them to our FD-315H1, FD-215H1, FD-215H2 or CP-15H10, and you will get the perfect combination for discos, raves, permanent installations and theaters.



OUTLINE DRAWING

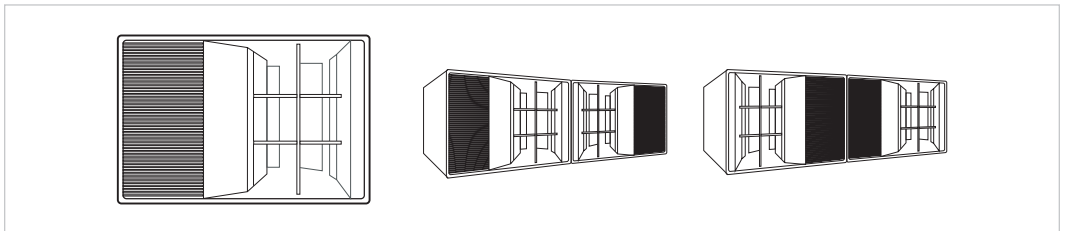

DESCRIPTIVE DATA

Frequency range ·	-	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	-	Finish ·	Urethane
Maximum SPL ·	-	Grille ·	Perforated metal
RMS (W) ·	-	Connections ·	-
Peak power (W) ·	-	Height (In/cm) ·	-
Impedance (Ohms) ·	-	Width In/cm) ·	-
Passive crossover ·	-	Depth (In/cm) ·	-
Dispersion (Horiz./Vert.) ·	-	Weight (lbs/Kg) ·	-
High frequencies ·	-	Fixing points ·	-
Low frequencies ·	-		

SPL VS FREQUENCY

