



:: FD-15H1 ::


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

A two way, full range, high SPL enclosure for sound reinforcement applications. It incorporates a 15" woofer and a 1" compression driver. It provides high output and a full range response in a versatile 100 dB compact system. It is a great system for musicians and DJ's playing in small to medium venues. Also available amplified.



OUTLINE DRAWING

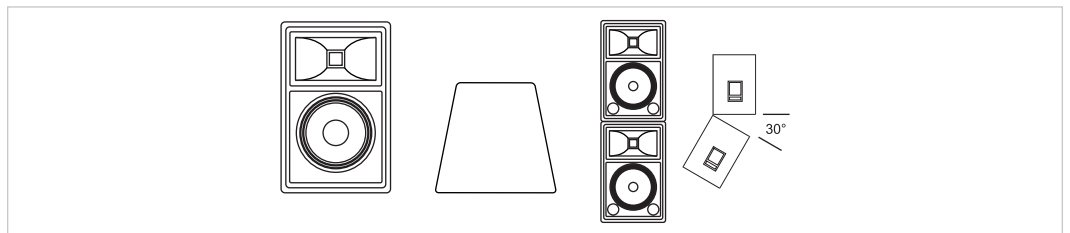

DESCRIPTIVE DATA

Frequency range ·	55 Hz - 18 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	99 dB	Finish ·	Urethane
Maximum SPL ·	130	Grille ·	Perforated metal
RMS (W) ·	400	Connections ·	-
Peak power (W) ·	800	Height (In/cm) ·	29 1/4" / 74.30
Impedance (Ohms) ·	8	Width In/cm) ·	18 3/4" / 47.63
Passive crossover ·	2.2 KHz	Depth (In/cm) ·	18 1/2" / 46.99
Dispersion (Horiz./Vert.) ·	60° x 40° (1")	Weight (lbs/Kg) ·	76 / 34.55
High frequencies ·	1" driver	Fixing points ·	9 points
Low frequencies ·	1 x woofer 15"		

SPL VS FREQUENCY

