



:: FD-15H2 ::


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

A two way, full range, high SPL enclosure for sound reinforcement applications. It incorporates a 15" woofer and a 2" compression driver. It provides high output and a full range response in a versatile 100 dB compact system. It is a great system for musicians and DJ's playing in small to medium venues. Also available amplified.



OUTLINE DRAWING

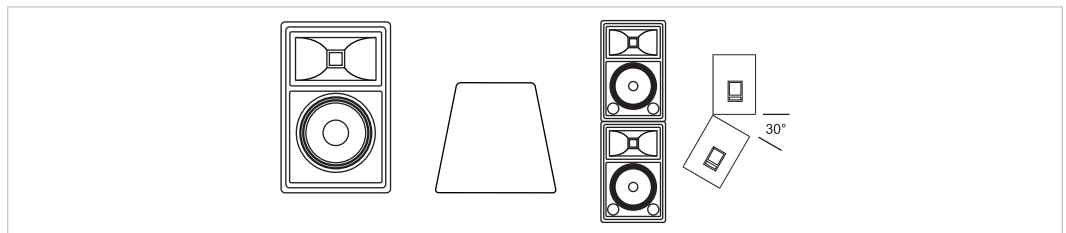

DESCRIPTIVE DATA

Frequency range ·	50 Hz - 18.5 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	100 dB	Finish ·	Urethane
Maximum SPL ·	134.8	Grille ·	Perforated metal
RMS (W) ·	750	Connections ·	-
Peak power (W) ·	1500	Height (In/cm) ·	29 1/4" / 74.30
Impedance (Ohms) ·	8	Width In/cm) ·	18 3/4" / 47.63
Passive crossover ·	1.6 KHz	Depth (In/cm) ·	18 1/2" / 46.99
Dispersion (Horiz./Vert.) ·	50° x 50° (2")	Weight (lbs/Kg) ·	82 / 37.27
High frequencies ·	2" driver	Fixing points ·	9 points
Low frequencies ·	1 x woofer 15"		

SPL VS FREQUENCY

