




:: FD-215H1 ::

TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

This enclosure's crossover was built based on a special and very specific design. A cascade of precise filters make the sound warm and natural, while producing extremely high SPL's. With superior output and performance along with an extremely attractive price, FD-215H1 is great for theatres, discos, permanent installations, bands as well as mobile dj's.

OUTLINE DRAWING

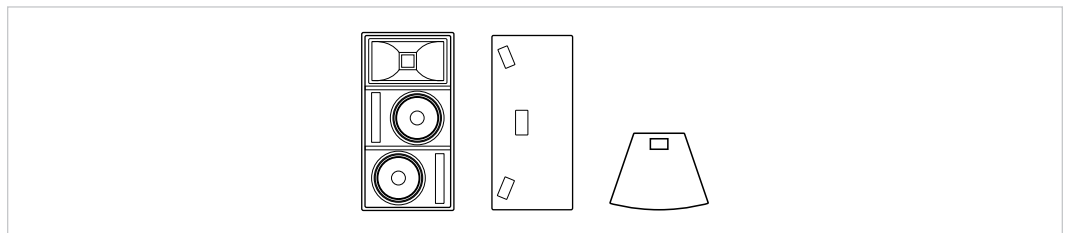

DESCRIPTIVE DATA

Frequency range ·	40 Hz - 20 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	100 dB	Finish ·	Urethane
Maximum SPL ·	135	Grille ·	Perforated metal
RMS (W) ·	800	Connections ·	Speakon (opt. bar strip)
Peak power (W) ·	1600	Height (In/cm) ·	45 3/8" / 115.27
Impedance (Ohms) ·	4 opt. 8	Width In/cm ·	22 1/8" / 56.21
Passive crossover ·	2.2 KHz	Depth (In/cm) ·	25" / 63.50
Dispersion (Horiz./Vert.) ·	60° x 40° (1")	Weight (lbs/Kg) ·	132 / 60
High frequencies ·	1" driver	Fixing points ·	9 points
Low frequencies ·	1 x woofer 15"		

SPL VS FREQUENCY

