



:: FD-215H2 ::


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

This enclosure's crossover was built based on a special and very specific design. A cascade of precise filters make the sound warm and natural, while producing extremely high SPL's. With superior output and performance along with an extremely attractive price, FD-215H2 is great for theatres, discos, permanent installations, bands as well as mobile dj's.



OUTLINE DRAWING

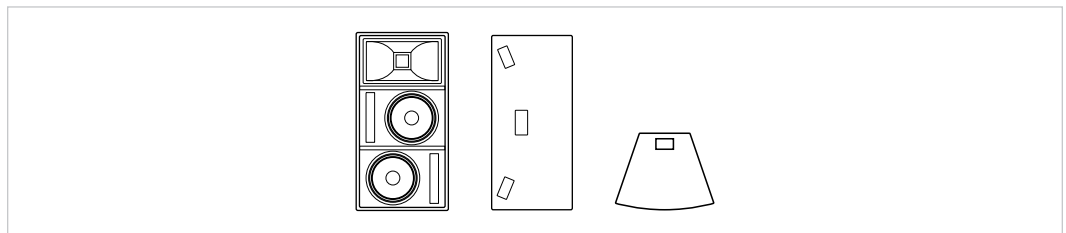

DESCRIPTIVE DATA

Frequency range ·	42 Hz - 18.5 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	102 dB	Finish ·	Urethane
Maximum SPL ·	132	Grille ·	Perforated metal
RMS (W) ·	1000	Connections ·	Speakon (opt. bar strip)
Peak power (W) ·	2000	Height (In/cm) ·	45 3/8" / 115.27
Impedance (Ohms) ·	4	Width In/cm) ·	22 5/8" / 57.47
Passive crossover ·	1.6 KHz	Depth (In/cm) ·	25" / 63.50
Dispersion (Horiz./Vert.) ·	60° x 40° (2")	Weight (lbs/Kg) ·	136 / 61.82
High frequencies ·	2" driver	Fixing points ·	9 points
Low frequencies ·	1 x woofer 15"		

SPL VS FREQUENCY

