



:: FD-300T ::


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

This economical design is the right choice for mobile discos, conferences, multi media or anywhere clear efficient sound is needed. This portable cabinet is a powerful unit that has many uses.



OUTLINE DRAWING

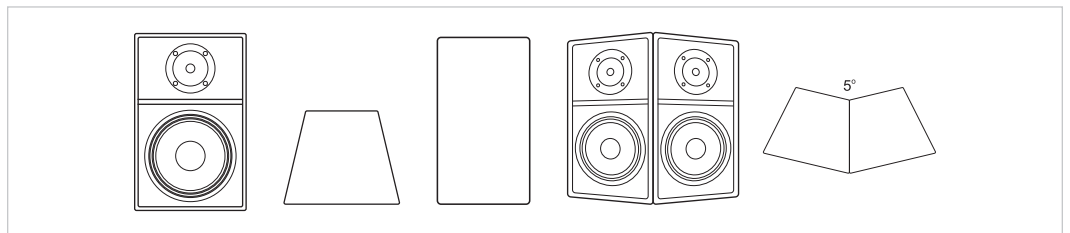

DESCRIPTIVE DATA

Frequency range ·	50 Hz - 20 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	100 dB	Finish ·	Urethane
Maximum SPL ·	130.8	Grille ·	Perforated metal
RMS (W) ·	300	Connections ·	-
Peak power (W) ·	600	Height (In/cm) ·	25 1/2" / 64.77
Impedance (Ohms) ·	8	Width In/cm) ·	15 1/2" / 39.37
Passive crossover ·	3.5 KHz	Depth (In/cm) ·	16 1/8" / 40.97
Dispersion (Horiz./Vert.) ·	Radial	Weight (lbs/Kg) ·	61 / 27.73
High frequencies ·	Biradial/Tweeter	Fixing points ·	11 points
Low frequencies ·	1 x woofer 12"		

SPL VS FREQUENCY

