




.: FD-315H1 .:

TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

The FD-215B is an extremely compact cabinet offering high power handling and high sensitivity. The combination of a newly designed speaker surround on a unique 15" driver along with a precisely tuned enclosure results in a highly accurate, wide bass range response with very low power compression.

OUTLINE DRAWING

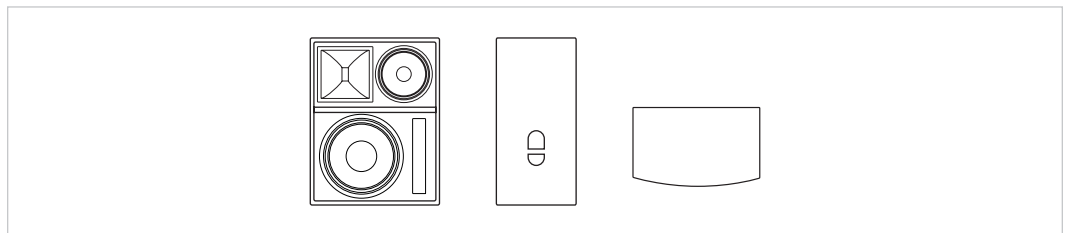

DESCRIPTIVE DATA

Frequency range ·	34 Hz - 18 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	100 dB	Finish ·	Urethane
Maximum SPL ·	133.4	Grille ·	Perforated metal
RMS (W) ·	550	Connections ·	Speakon (opt. bar strip)
Peak power (W) ·	1100	Height (In/cm) ·	28 3/4" / 73.03
Impedance (Ohms) ·	8 opt. 4	Width In/cm) ·	22" / 55.88
Passive crossover ·	400 Hz / 2.2 KHz	Depth (In/cm) ·	19 1/4" / 48.90
Dispersion (Horiz./Vert.) ·	100° x 100° (1")	Weight (lbs/Kg) ·	85 / 38.64
High frequencies ·	1" driver & 10" woofer	Fixing points ·	9 points
Low frequencies ·	1 x haut-parleur 12"		

SPL VS FREQUENCY

