



:: FD-6T ::


TECHNICAL SPECIFICATIONS

FOUNDATION SERIES

This model sets the standard in small forefront systems for a vast range of applications (theaters, concert halls, churches, night-clubs, restaurants). This high quality speaker is used in small clubs and home surround sound systems. The system's advanced technology triggers exceptional performances and power handling. Constant directivity, very low distortion and extended low frequency response and a smooth high end are some of its characteristics.



OUTLINE DRAWING

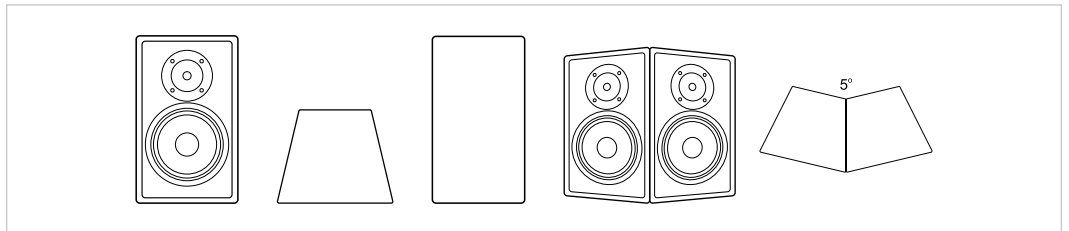

DESCRIPTIVE DATA

Frequency range ·	50 Hz - 19 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	93 dB	Finish ·	Urethane
Maximum SPL ·	120.8	Grille ·	Perforated metal
RMS (W) ·	150	Connections ·	-
Peak power (W) ·	300	Height (In/cm) ·	13 3/8" / 33.99
Impedance (Ohms) ·	8	Width In/cm) ·	8 1/2" / 21.59
Passive crossover ·	3.5 KHz	Depth (In/cm) ·	8 1/4" / 20.96
Dispersion (Horiz./Vert.) ·	Conical	Weight (lbs/Kg) ·	15.5 / 7.05
High frequencies ·	Biradial/Tweeter	Fixing points ·	-
Low frequencies ·	1 x woofer 6"		

SPL VS FREQUENCY

