



# :: FD-8T ::


## TECHNICAL SPECIFICATIONS

### FOUNDATION SERIES

This model sets the standard in small forefront systems for a vast range of applications. This high quality speaker system is used in small clubs and home surround sound systems. The system's advanced technology triggers an exceptional power handling, a constant directivity, very low distortion and extended low frequency response with a smooth high end.



#### OUTLINE DRAWING

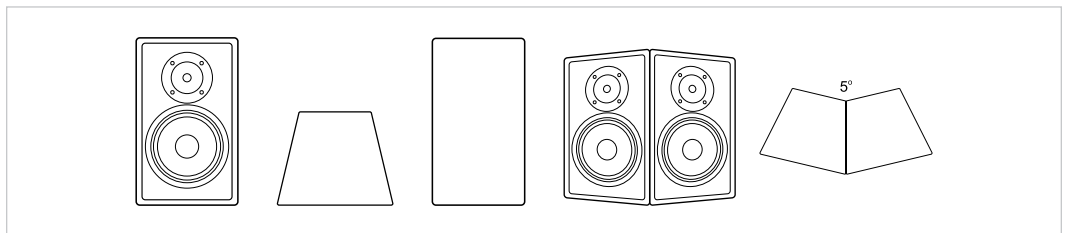

#### DESCRIPTIVE DATA

<b>Frequency range</b> ·	70 Hz - 19 kHz	<b>Material/Cabinet</b> ·	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b> ·	94 dB	<b>Finish</b> ·	Urethane
<b>Maximum SPL</b> ·	124	<b>Grille</b> ·	Perforated metal
<b>RMS (W)</b> ·	250	<b>Connections</b> ·	-
<b>Peak power (W)</b> ·	500	<b>Height (In/cm)</b> ·	16 3/4" / 42.55
<b>Impedance (Ohms)</b> ·	8	<b>Width In/cm)</b> ·	10" / 25.40
<b>Passive crossover</b> ·	3.5 KHz	<b>Depth (In/cm)</b> ·	10 1/4" / 26.04
<b>Dispersion (Horiz./Vert.)</b> ·	Conical	<b>Weight (lbs/Kg)</b> ·	25 / 11.36
<b>High frequencies</b> ·	Biradial/Tweeter	<b>Fixing points</b> ·	-
<b>Low frequencies</b> ·	1 x woofer 8"		

#### SPL VS FREQUENCY

