




.: MS-12H1 .:

TECHNICAL SPECIFICATIONS

MULTI SERIES

This two-way stage wedge monitor was designed floor use. Its 60° x 40° horn provides optimum coverage in any situation, and 12" woofer produces extraordinary sensitivity and response curve linearity. The MS-12H1 ensures a maximum linearity at high power levels, making the most with the newest technologies.

OUTLINE DRAWING

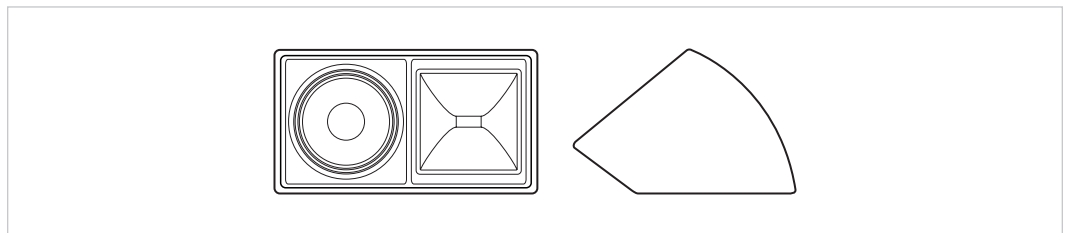

DESCRIPTIVE DATA

Frequency range ·	50 Hz - 20 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	100 dB	Finish ·	Urethane
Maximum SPL ·	132	Grille ·	Perforated metal
RMS (W) ·	400	Connections ·	Speakon (opt. bar strip)
Peak power (W) ·	800	Height (In/cm) ·	24 7/8" / 63.18
Impedance (Ohms) ·	8	Width In/cm) ·	15 1/4" / 38.74
Passive crossover ·	2.2 kHz	Depth (In/cm) ·	14 1/2" / 36.83
Dispersion (Horiz./Vert.) ·	60° x 40° (1")	Weight (lbs/Kg) ·	45 / 20.45
High frequencies ·	1" driver	Fixing points ·	11 points
Low frequencies ·	1 x woofer 12"		

SPL VS FREQUENCY

