




:: MS-12H2 ::

TECHNICAL SPECIFICATIONS

MULTI SERIES

The MS-12H2 is a flexible two-way system. The 2" exit compression driver allows long term high output. In horizontal position, it is a powerful low profile unit for stage monitoring. Mounted vertically, it is a very effective PA capable of high power reference quality reproduction. A selector allows the option of passive or active mode.

OUTLINE DRAWING

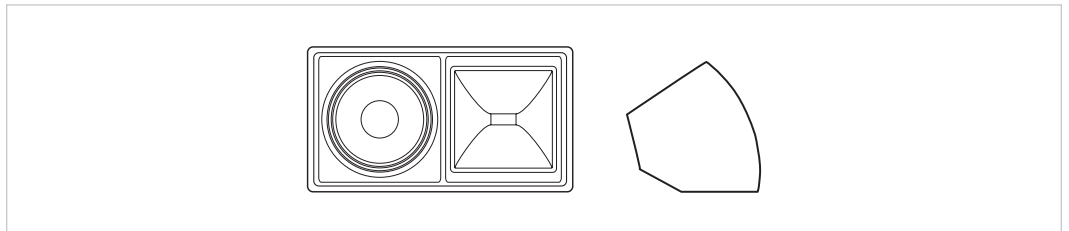

DESCRIPTIVE DATA

Frequency range ·	50 Hz - 20 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	98 dB	Finish ·	Urethane
Maximum SPL ·	132	Grille ·	Perforated metal
RMS (W) ·	700 (LF 600/MHF 100)	Connections ·	-
Peak power (W) ·	1400 (LF 1200/MHF 200)	Height (In/cm) ·	24 7/8" / 63.18
Impedance (Ohms) ·	8	Width In/cm) ·	15 1/4" / 38.74
Passive crossover ·	1.6 KHz	Depth (In/cm) ·	14 1/2" / 36.83
Dispersion (Horiz./Vert.) ·	50° x 50° (2")	Weight (lbs/Kg) ·	70 / 31.82
High frequencies ·	2" driver	Fixing points ·	11 points
Low frequencies ·	1 x woofer 12"		

SPL VS FREQUENCY

