



:: MS-210H1 ::


TECHNICAL SPECIFICATIONS

MULTI SERIES

This enclosure can be used as a low profile stage monitor or vertically stand mounted for PA applications. The MS-210H1 has two 10" LF output drivers and 1" HF exit driver. It is capable of high sound pressure levels while keeping a clean detailed sound.



OUTLINE DRAWING

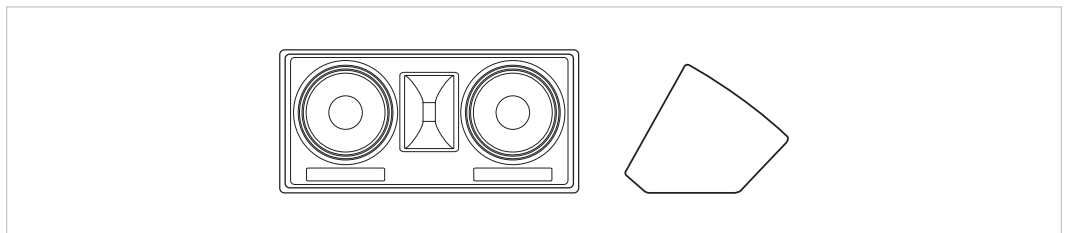

DESCRIPTIVE DATA

Frequency range ·	46 Hz - 20 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	99 dB	Finish ·	Urethane
Maximum SPL ·	133.5	Grille ·	Perforated metal
RMS (W) ·	600 (LF 500 / HF 100)	Connections ·	Speakon (opt. bar strip)
Peak power (W) ·	1400 (LF 1200 / HF 200)	Height (In/cm) ·	14 1/4" / 36.20
Impedance (Ohms) ·	4	Width In/cm) ·	27 1/8" / 68.90
Passive crossover ·	1.6 kHz	Depth (In/cm) ·	16" / 40.64
Dispersion (Horiz./Vert.) ·	70° x 50° (1")	Weight (lbs/Kg) ·	-
High frequencies ·	1" driver	Fixing points ·	11 points
Low frequencies ·	2 x woofer 10"		

SPL VS FREQUENCY

