



# :: MS-212H2 ::


## TECHNICAL SPECIFICATIONS

### MULTI SERIES

This enclosure can be used as a low profile stage monitor or vertically stand mounted for PA applications. The MS-212H2 has two 12" LF output drivers and 2" HF exit driver, coupled to a proprietary 50° x 50° horn. It is capable of high sound pressure levels while keeping a clean detailed sound.



### OUTLINE DRAWING

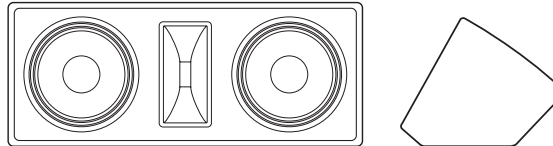

### DESCRIPTIVE DATA

<b>Frequency range</b> ·	46 Hz - 20 kHz	<b>Material/Cabinet</b> ·	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b> ·	100 dB	<b>Finish</b> ·	Urethane
<b>Maximum SPL</b> ·	135.5	<b>Grille</b> ·	Perforated metal
<b>RMS (W)</b> ·	900 (LF 800/MHF 100)	<b>Connections</b> ·	-
<b>Peak power (W)</b> ·	1800 (LF 1600/MHF 200)	<b>Height (In/cm)</b> ·	34" / 86.36
<b>Impedance (Ohms)</b> ·	4	<b>Width In/cm)</b> ·	15 1/4" / 38.74
<b>Passive crossover</b> ·	1.6 KHz	<b>Depth (In/cm)</b> ·	14 1/2" / 36.83
<b>Dispersion (Horiz./Vert.)</b> ·	50° x 50° (2")	<b>Weight (lbs/Kg)</b> ·	90 / 40.91
<b>High frequencies</b> ·	2" driver	<b>Fixing points</b> ·	11 points
<b>Low frequencies</b> ·	2 x woofer 12"		

### SPL VS FREQUENCY

