



# .: NAC-215 .:


## TECHNICAL SPECIFICATIONS

### THEATRE SERIES

This enclosure will handle an impressive 1200 Watts RMS without overload or distortion. The multi-gap venting of its BAL drivers will perform at high levels over extended periods with minimal limiting from power compression and thermal overload. Where a high impact bass with very low distortion in a small-sized cabinet is required, the NAC-215 is the perfect solution.



#### OUTLINE DRAWING

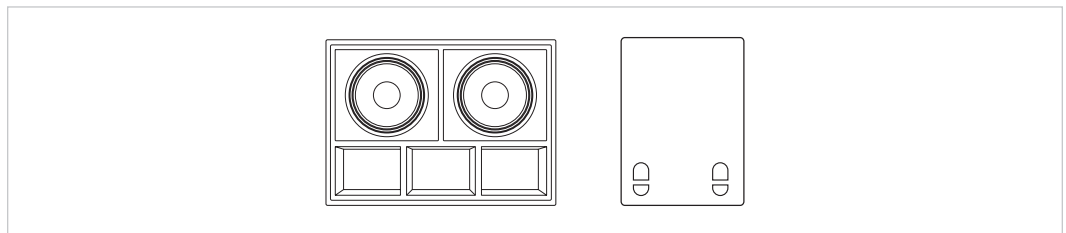

#### DESCRIPTIVE DATA

<b>Frequency range</b> ·	35Hz/140 Hz	<b>Material/Cabinet</b> ·	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b> ·	106 dB	<b>Finish</b> ·	Urethane
<b>Maximum SPL</b> ·	143.8	<b>Grille</b> ·	Perforated metal
<b>RMS (W)</b> ·	1500	<b>Connections</b> ·	-
<b>Peak power (W)</b> ·	3000	<b>Height (In/cm)</b> ·	30 1/2" / 77.47
<b>Impedance (Ohms)</b> ·	4 opt. 8	<b>Width In/cm)</b> ·	42 1/2" / 107.95
<b>Passive crossover</b> ·	100 Hz	<b>Depth (In/cm)</b> ·	25 1/4" / 64.14
<b>Dispersion (Horiz./Vert.)</b> ·	N/A	<b>Weight (lbs/Kg)</b> ·	195 / 88.64
<b>High frequencies</b> ·	-	<b>Fixing points</b> ·	-
<b>Low frequencies</b> ·	2 x woofer 15"		

#### SPL VS FREQUENCY

