



# .: S-60X60 .:


## TECHNICAL SPECIFICATIONS

### STADIUM SERIES

The Transparence™ Stadium Series designs are typical two-way, three-driver loud-speaker systems. The high intelligibility and tightly controlled vocal performances are achieved through dual phasing devices and specific custom designed horn coverage. They have unbelievable directivity control (even into very low frequencies) while maintaining the highest audio quality, a part of the unsailable trademarks of the Transparence™ Stadium Series. This series is the ideal choice for stadiums, arenas, coliseums, large halls, or anywhere long throw projection and high directivity control are required.



#### OUTLINE DRAWING

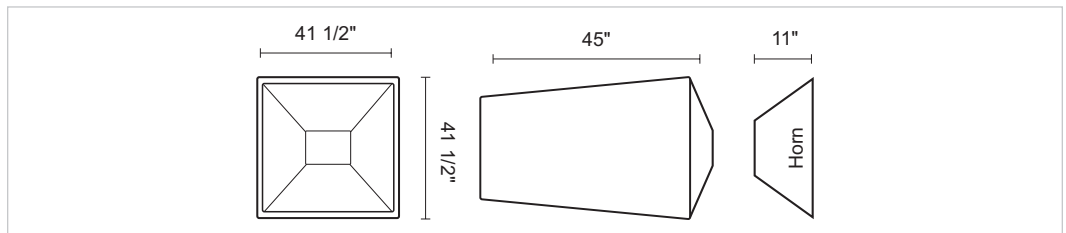

#### DESCRIPTIVE DATA

<b>Frequency range</b> ·	125 Hz / 900 kHz	<b>Material/Cabinet</b> ·	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b> ·	LMF 110 dB / HF 112 dB	<b>Finish</b> ·	Urethane
<b>Maximum SPL</b> ·	133.8	<b>Grille</b> ·	Perforated metal
<b>RMS (W)</b> ·	1000	<b>Connections</b> ·	-
<b>Peak power (W)</b> ·	2000	<b>Height (In/cm)</b> ·	See drawing
<b>Impedence (Ohms)</b> ·	4	<b>Width In/cm)</b> ·	See drawing
<b>Passive crossover</b> ·	900 Hz	<b>Depth (In/cm)</b> ·	See drawing
<b>Dispersion (Horiz./Vert.)</b> ·	-	<b>Weight (lbs/Kg)</b> ·	145 / 65.9
<b>High frequencies</b> ·	2" driver	<b>Fixing points</b> ·	-
<b>Low frequencies</b> ·	2 x woofer 15"		

#### SPL VS FREQUENCY

