



:: SM-12H1 ::


TECHNICAL SPECIFICATIONS

STAGE MONITOR SERIES

The SM-12H1 is a flexible two way system. A 60° x 40° horn provides optimum coverage for any application. This monitor is designed to ensure the maximum linearity at high power level with the most advanced technology. Excellent as a stage monitor and in small to medium size PA. It's a powerful, small, and low profile stage monitor.



OUTLINE DRAWING

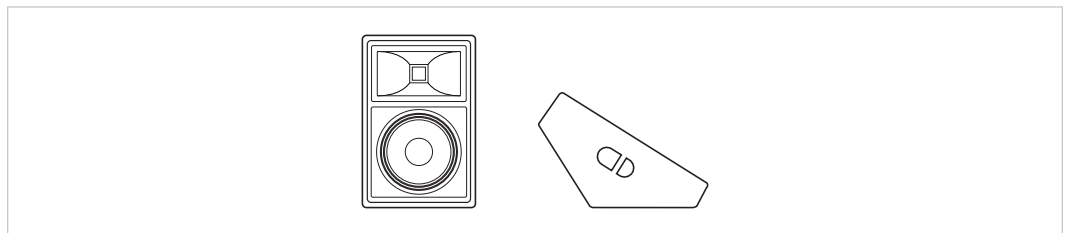

DESCRIPTIVE DATA

Frequency range ·	50 Hz - 20 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	98 dB	Finish ·	Urethane
Maximum SPL ·	130	Grille ·	Perforated metal
RMS (W) ·	400	Connections ·	Speakon (opt. bar strip)
Peak power (W) ·	800	Height (In/cm) ·	22 3/8" / 56.83
Impedance (Ohms) ·	8	Width In/cm) ·	14 7/8" / 37.78
Passive crossover ·	2.2 KHz	Depth (In/cm) ·	13 3/8" / 33.97
Dispersion (Horiz./Vert.) ·	60° x 40°(1")	Weight (lbs/Kg) ·	63 / 28.64
High frequencies ·	1" driver	Fixing points ·	-
Low frequencies ·	1 x woofer 12"		

SPL VS FREQUENCY

