



:: SM-12H2 ::


TECHNICAL SPECIFICATIONS

STAGE MONITOR SERIES

The SM-12H2 is also a flexible two way system. The 2" exit compression driver allows long term high output. Excellent as a stage monitor positionned horizontally, it is a powerful small, low profile stage monitor.



OUTLINE DRAWING

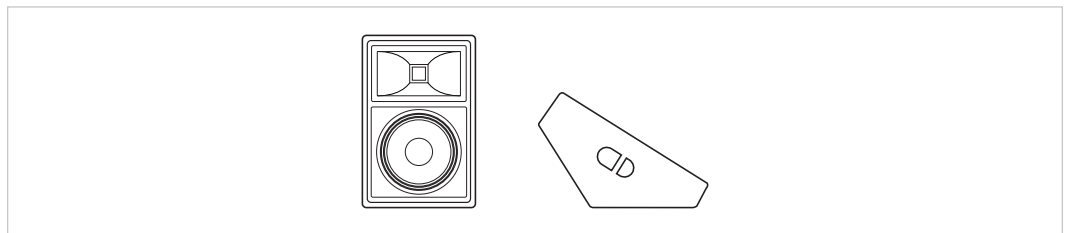

DESCRIPTIVE DATA

Frequency range ·	50 Hz - 20 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	98 dB	Finish ·	Urethane
Maximum SPL ·	131	Grille ·	Perforated metal
RMS (W) ·	550 (LF 450/HF 100)	Connections ·	Speakon (opt. bar strip)
Peak power (W) ·	1100 (LF 900/HF 200)	Height (In/cm) ·	22 3/8" / 56.83
Impedance (Ohms) ·	8	Width In/cm) ·	14 7/8" / 37.78
Passive crossover ·	1.6 KHz	Depth (In/cm) ·	13 3/8" / 33.97
Dispersion (Horiz./Vert.) ·	50° x 50° (2")	Weight (lbs/Kg) ·	66 / 30
High frequencies ·	2" driver	Fixing points ·	-
Low frequencies ·	1 x woofer 12"		

SPL VS FREQUENCY

