



# .: SM-15H1 .:


## TECHNICAL SPECIFICATIONS

### STAGE MONITOR SERIES

The SM-15H1 is good as a stage monitor or for a small to medium size PA company. A 60° x 40° horn provides optimum coverage for any application. This monitor is designed to ensure the maximum linearity at high power level with the use of the most advanced technology. The 15" woofer produces very good sensitivity and response curve linearity.



#### OUTLINE DRAWING

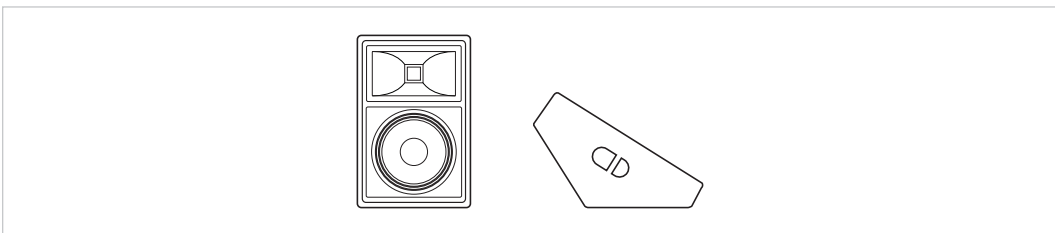

#### DESCRIPTIVE DATA

<b>Frequency range</b>	45 Hz - 20 kHz	<b>Material/Cabinet</b>	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b>	99 dB	<b>Finish</b>	Urethane
<b>Maximum SPL</b>	132	<b>Grille</b>	Perforated metal
<b>RMS (W)</b>	500	<b>Connections</b>	Speakon (opt. bar strip)
<b>Peak power (W)</b>	1000	<b>Height (In/cm)</b>	26" / 66.04
<b>Impedance (Ohms)</b>	8	<b>Width In/cm)</b>	18 3/8" / 46.67
<b>Passive crossover</b>	2.2 KHz	<b>Depth (In/cm)</b>	15 3/8" / 39.07
<b>Dispersion (Horiz./Vert.)</b>	60° x 40° (1")	<b>Weight (lbs/Kg)</b>	85 / 38.64
<b>High frequencies</b>	1" driver	<b>Fixing points</b>	-
<b>Low frequencies</b>	1 x woofer 15"		

#### SPL VS FREQUENCY

