



# :: SM-15H2 ::


## TECHNICAL SPECIFICATIONS

### STAGE MONITOR SERIES

A two-way full range monitor which includes a 15" woofer and a 2" throat with proprietary horn. For uncompromised sound quality, it is capable of high power reference quality reproduction. It offers a switchable active/passive mode option.



#### OUTLINE DRAWING

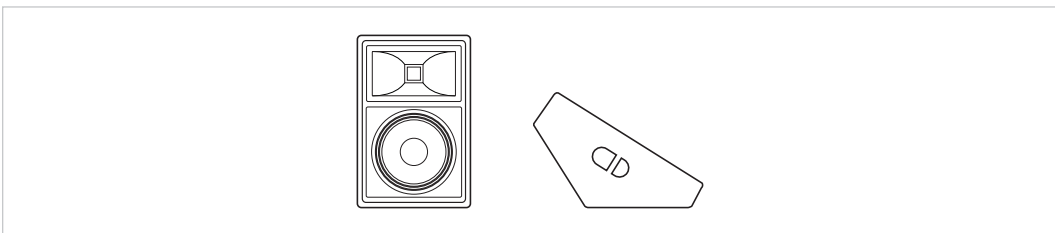

#### DESCRIPTIVE DATA

<b>Frequency range</b>	45 Hz - 20 kHz	<b>Material/Cabinet</b>	5/8" Birch 13 ply
<b>Sensitivity (SPL 1W @ 1m)</b>	99 dB	<b>Finish</b>	Urethane
<b>Maximum SPL</b>	132	<b>Grille</b>	Perforated metal
<b>RMS (W)</b>	550 (LF 450/HF 100)	<b>Connections</b>	Speakon (opt. bar strip)
<b>Peak power (W)</b>	1100 (LF 900/HF 200)	<b>Height (In/cm)</b>	26" / 66.04
<b>Impedance (Ohms)</b>	8	<b>Width In/cm)</b>	18 3/8" / 46.67
<b>Passive crossover</b>	1.6 KHz	<b>Depth (In/cm)</b>	15 3/8" / 39.07
<b>Dispersion (Horiz./Vert.)</b>	90° x 40° (2")	<b>Weight (lbs/Kg)</b>	90 / 40.91
<b>High frequencies</b>	2" driver	<b>Fixing points</b>	-
<b>Low frequencies</b>	1 x woofer 15"		

#### SPL VS FREQUENCY

