



:: TH-2X15B ::


TECHNICAL SPECIFICATIONS

THEATRE SERIES

This high powered loudspeaker with 1000 Watts RMS (2000 Watts peak) will provide plenty of SPL reserve. TH-2X15B's deep solid bass sound is formulated for theatres, discotheques, small clubs or anywhere you have limited space but need big sound.



OUTLINE DRAWING

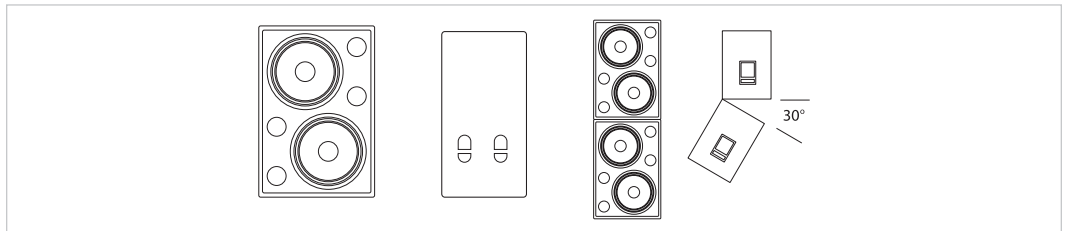

DESCRIPTIVE DATA

Frequency range ·	44 Hz - 400 kHz	Material/Cabinet ·	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m) ·	101 dB	Finish ·	Urethane
Maximum SPL ·	138.8	Grille ·	Perforated metal
RMS (W) ·	1200	Connections ·	-
Peak power (W) ·	2400	Height (In/cm) ·	31 1/2" / 80.01
Impedance (Ohms) ·	4 opt. 8	Width In/cm) ·	26 7/8" / 68.26
Passive crossover ·	100 Hz	Depth (In/cm) ·	19 3/4" / 50.17
Dispersion (Horiz./Vert.) ·	N/A	Weight (lbs/Kg) ·	100 / 45.45
High frequencies ·	-	Fixing points ·	-
Low frequencies ·	2 x woofer 15"		

SPL VS FREQUENCY

