



:: UB-6H1 ::


TECHNICAL SPECIFICATIONS

UNDERBALCONY SERIES

The UB-6H1 sets the standard for small foreground systems used in a vast range of applications: theaters, concert halls, churches, nightclubs, restaurants and even in theme entertainment park's rides. These small high quality speakers easily qualify for small clubs and home sound systems. Their advanced technology provides exceptional performance and power handling. Constant directivity, high power handling, very low distortion and extended low frequency response with a smooth high end are the stand out characteristics of this enclosure.



OUTLINE DRAWING

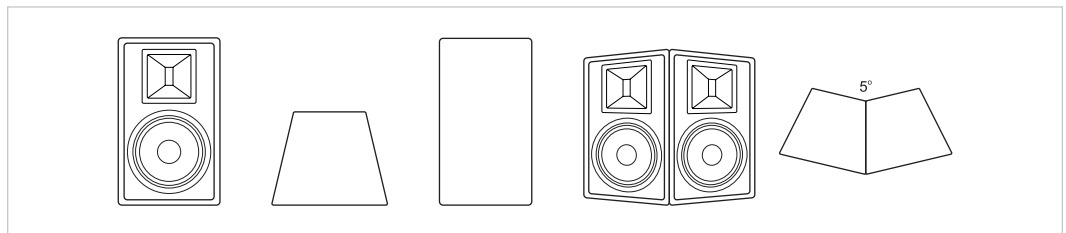

DESCRIPTIVE DATA

Frequency range	87.2 Hz - 19 kHz	Material/Cabinet	5/8" Birch 13 ply
Sensitivity (SPL 1W @ 1m)	93 dB	Finish	Urethane
Maximum SPL	122	Grille	Perforated metal
RMS (W)	200	Connections	-
Peak power (W)	400	Height (In/cm)	15 3/4" / 40.01
Impedance (Ohms)	8 opt.4	Width In/cm)	8 1/2" / 21.59
Passive crossover	2.2 KHz	Depth (In/cm)	8 1/4" / 20.96
Dispersion (Horiz./Vert.)	Constant directivity 110°	Weight (lbs/Kg)	20 / 9.09
High frequencies	Dome tweeter 1 3/8"	Fixing points	8 points
Low frequencies	1 x woofer 6"		

SPL VS FREQUENCY

